


Overhead & Profit	7.5%	2,081
P & P bond	0.00%	0
Design Fees		0
Contingency	0%	0
TOTAL COST		\$29,822



Sheriff

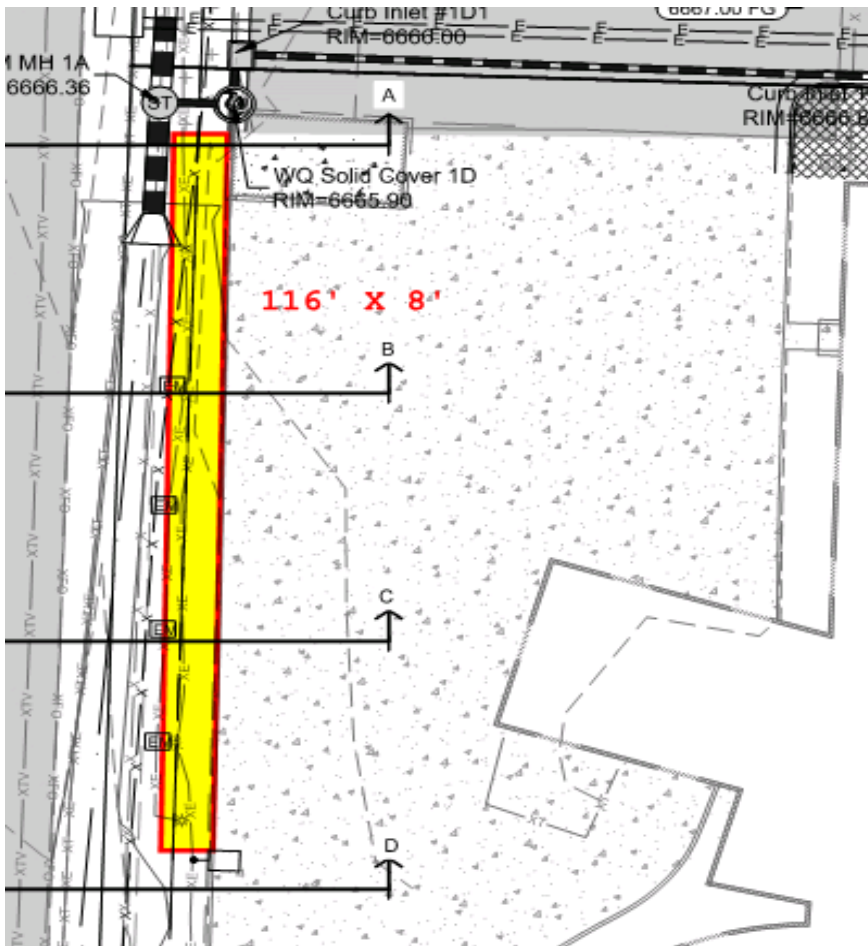

Construction Proposal

GioVanni Construction, LLC

June 19, 2019
CLEF Backside of Sheriff's Office Parking Extension
Lagoon Court
Steamboat Springs, Colorado 80487

GioVanni Construction, LLC
PO Box 772827
2206 Downhill Drive
Steamboat Springs, Colorado 80477-2827
United States
970.761.2854
giovniconstruction@icloud.com

Proposal

June 19, 2019

Between the Owner: **(Calcon Contractors) Jim Kohler**
2270 West Bates Ave.
Englewood, Colorado 80110-1215
303.762.1554

And the Contractor: **Giovonni Construction, LLC**
PO Box 772827
2206 Downhill Drive
Steamboat Springs, Colorado 80477-2827
United States
Colorado ID# 20171612796
970.761.2854

For the Project: **CLEF Backside of Sheriff's Office Parking Extension**
Lagoon Court
Steamboat Springs, Colorado 80487

SCOPE OF WORK:

Supply material, labor and services to remove and replace curb and gutter, excavate existing vegetation and fill, grade and compact sub-grade, furnish and install 8" of Pit run, Furnish and install 4" of Class 6 A.B.C., Dowel into Existing Concrete, install #4 Rebar @ 16" o.c.e.w. and install 6" Concrete Pavement

SPECIAL CONDITIONS:

Inclusions: mobilization, excavation, export trucking, import trucking, disposal fees, saw cutting of removals, grade and compact sub grade, Pit run and labor, class 6 and labor, rebar, forming labor, place and finish labor, concrete materials, curing compounds, backfill of curb and gutter with existing material

Exclusions: material testing, construction staking, joint sealing, soils corrections, geo fabric/ textiles, S.O.G. insulation, adjustment of utility apparatuses, top soil, seeding, striping, bonding, retention of payment

TOTAL BASE PRICE:

\$22,686.80

Project Totals:

SITE IMPROVEMENTS

Curb and Gutter Remove and Replace

Excavation and Grading

18" sub cut excavation

export trucking

disposal fees

grading and compact of sub grade

Excavation and Grading **\$3,151.00**

A.B.C. (Pit run and Class 6)

8" of Pit Run

4" of Class 6

A.B.C. (Pit run and Class 6) **\$3,135.00**

6" Reinforced Concrete Pavement

SUBTOTAL SITE IMPROVEMENTS **\$22,686.80**

GRAND TOTAL **\$22,686.80**

Acceptance of Agreement

Witness our hand and seal on this _____ day of _____, 20__.

Signed in the presence of:

Witness

Witness

Contractor Signature

Owner Signature